




WM-NANO

TABLE-TOP WRAPPER



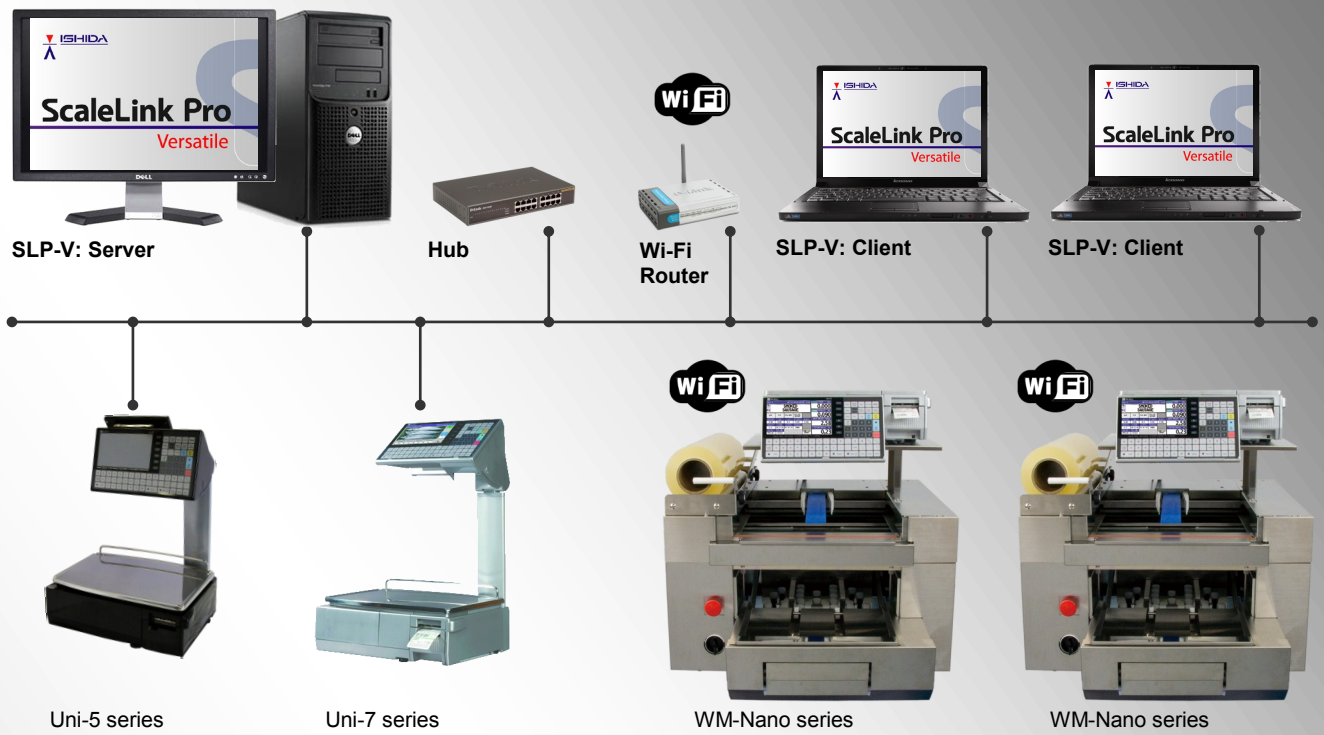

Technical Specifications...

	WM-Nano 'M' Type	WM-Nano 'L' Type
Packs Per Minute:	15 ppm	
Wrapping Capacity:	20~1500g	20~3500g
Weighing Capacity:	20~6000g	40~15000g
Wrapping Size:	Depth: 90~210mm (3.1"~8.3"); FP: 80mm (3.5") Width: 150~330mm (3.7"~13"); FP: 120mm (4.72") Height: 10~130mm (0.4"~3.9") Tray height: ≤45mm (1.8") Note: It is not possible to achieve all three maximum dimensions contemporary on the machine.	Depth: 127~254mm (5"~10"); FP: 80mm (3.5") Width: 150~350mm (5"~13.7"); FP: 120mm (4.72") Height: 10~130mm (0.4"~3.9") Tray height: ≤45mm (1.8") Note: It is not possible to achieve all three maximum dimensions contemporary on the machine.
Tray:	PSP, PP	
Film Type:	Poly or PVC	
Film Size:	350 · 400 · 450mm (13.7" · 15.75" · 17.7") Max. Ø: 165mm (6.3")	400 · 450 · 500 · 550 · 560mm (15.7" · 17.72" · 19.69" · 21.65" · 22") Max. Ø: 200mm (7.8")
Power:	Voltage: 220~240V Frequency: 50/60Hz	
Operating Temperature:	5°C~35°C (41°F~95°F)	
Humidity:	20%~85% R.H.	
Weight:	Wrapper: 90kg; Wrapper & scale: 100kg	
Noise:	73db	

 **ISHIDA**

Design and specifications are subject to change without prior notice.



ISHIDA CO., LTD.
44, Sanno-Cho, Shogoin, Sakyo-Ku,
Kyoto 606-8392, Japan.
T: +81 75 771 4141 | F: +81 75 751 1634
W: <http://www.ishida.com>

